



FEATURES

- Universal 85 - 264VAC or 120 - 373VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range -30°C - +70°C
- Low standby power consumption, high efficiency
- High I/O Isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Safety according to IEC/EN/UL62368/EN60335/GB4943 (CE/CCC pending)
- Withstand 300VAC surge input for 5s
- Over-voltage class III (designed to meet EN61558)
- Operating up to 5000 m altitude

LM75-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC62368, UL62368, EN62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.	Output Power(W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range(V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
CE/CCC (Pending)	LM75-20B05	70	5V/14A	4.5-5.5	86	10000
	LM75-20B12	72	12V/6A	10.2-13.8	88	6000
	LM75-20B15	75	15V/5A	13.5-18	88	5000
	LM75-20B24	76.8	24V/3.2A	21.6-28.8	90	1500
	LM75-20B48	76.8	48V/1.6A	43.2-52.8	91.5	680

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	373	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2	A
	230VAC		--	--	1	
Inrush Current	115VAC		--	40	--	
	230VAC		--	65	--	
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V/48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V/48V	--	±0.5	--	

Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	100	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	
		48V	--	200	--	
Temperature Coefficient			--	±0.02	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	--	0.3	W
Hold-up Time	115VAC		12	--	--	ms
	230VAC		60	--	--	
Short Circuit Protection	Recovery time is less than 5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection			110%-150% I _o , self-recovery			
Over-voltage Protection	5V	≤ 6.3VDC (Output voltage turn off) re-power on for recovery				
	12V	≤ 16.2VDC (Output voltage clamp)				
	15V	≤ 21.75VDC (Output voltage clamp)				
	24V	≤ 33.6VDC (Output voltage clamp)				
	48V	≤ 60VDC (Output voltage turn off) re-power on for recovery				
Note: *The "Tip and barrel method" is used for Ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - 	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC
	Input-output		4000	--	--	
	output - 		1250	--	--	
Insulation Resistance	Input - 	500VDC, 25±5°C, Humidity < 70%RH, non-condensing	100	--	--	MΩ
	Input - output		100	--	--	
	output - 		100	--	--	
Operating Temperature			-30	--	+70	°C
Storage Temperature			-40	--	+85	
Storage Humidity	Non-condensing		--	--	95	%RH
Switching Frequency				65		kHz
Power Derating	Operating temperature derating	5V output	+40°C to +70°C	1.3		% / °C
		Other output	+50°C to +70°C	2		
	Input voltage reduction	85VAC-100VAC	1.33			% / VAC
Safety Standard			Meet IEC/EN/UL62368/EN60335/GB4943			
Safety Class			CLASS I			
MTBF			MIL-HDBK-217F@25°C > 300,000 h			



Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	99.0 x 97.0 x 30.0 mm
Weight	220 g (Typ.)
Cooling Method	Free air convection



Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
EMS	ESD	IEC/EN 61000-4-2	Contact $\pm 6KV$ /Air $\pm 8KV$	Perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	$\pm 2KV$	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line $\pm 2KV$ /line to ground $\pm 4KV$	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	DIP	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


Product Characteristic Curve

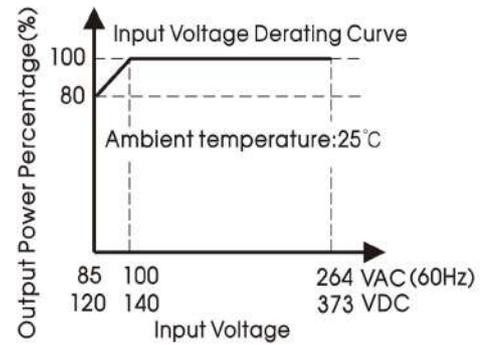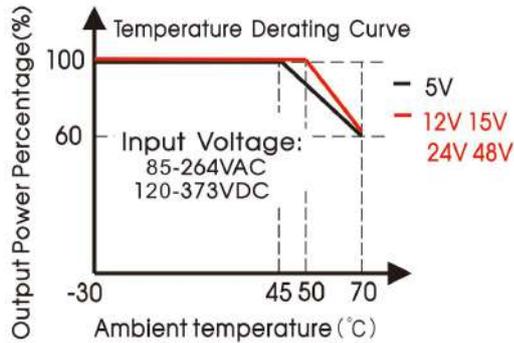

- Note: ① Input voltage reduction is required on the basis of temperature reduction for the input voltage is 85 - 100VAC/120 - 140VDC;
 ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

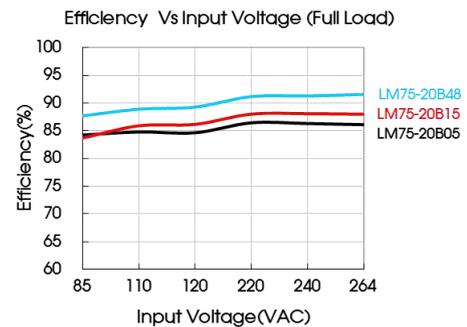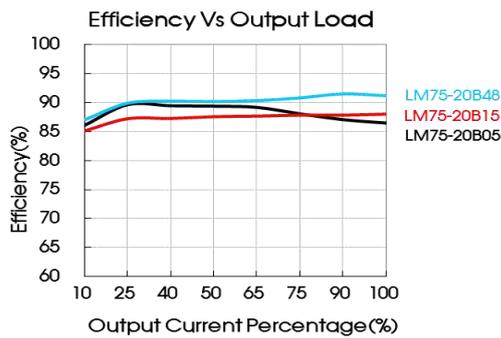

Dimensions and Recommended Layout

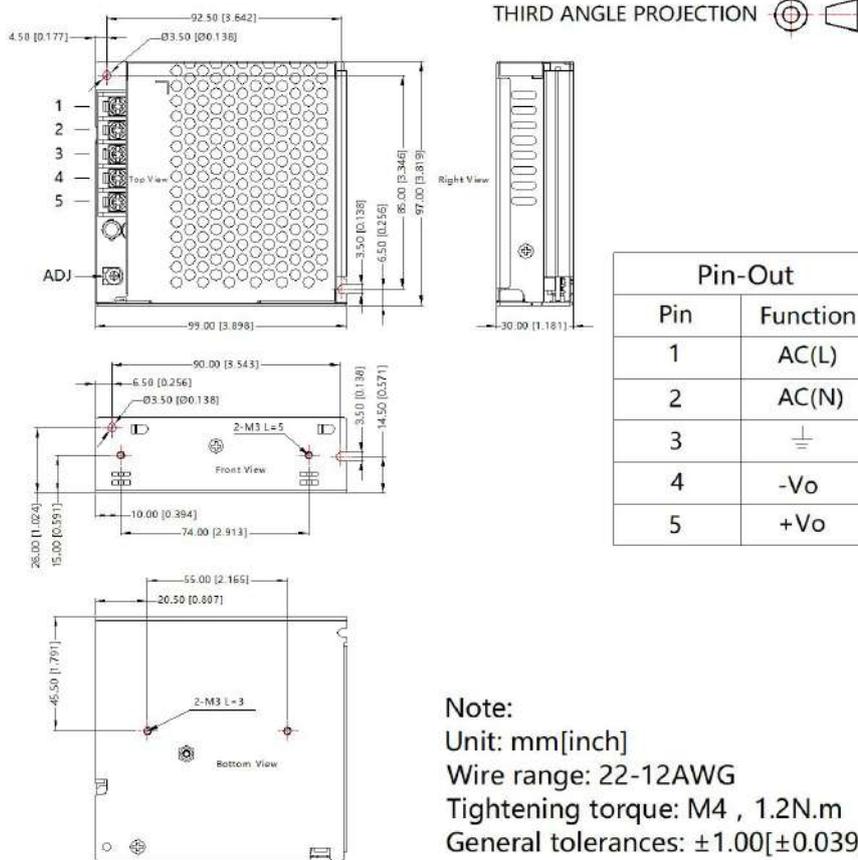

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220066;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
3. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com