

JWT Series

Triple Output
Industrial Power Supplies

- 5 Year Warranty
- Power Factor Corrected
- Approved to VDE01 60 Machinery Directive
- Universal Input (85 265VAC)

Key Market Segments & Applications

Factory Automation: Process Control, NC-Machining, Automotive, Packaging Equipment, Materials Handling, Chemical Processing, Robots

Test & Measurement: Burn-in & Test, Automated Test, Instrumentation, Measurement, Detection

JWT Features and Benefits

Features

- VDE01 60 Approved
- 5 Year Warranty
- Power Factor Corrected
- Level B EMI

Benefits

- No Additional Approvals Needed
- Lower Cost of Ownership
- Supports Global Use
- Assists Systems Compliance

Specifications


MODEL		JWT75	JWT100
ITEMS			
Max Output Power	W	75	100
Efficiency (Typ)	%	72	
Input Voltage range	-	85 - 265VAC (47 - 63Hz) or 120 - 330VDC	
Input Current Typ	A	1.2 / 0.6	1.4 / 0.7
Inrush Current	A	14A at 100VAC, 28A at 200VAC input	
Power Factor	-	Meets EN61000-3-2	
Output Voltage Accuracy	-	V1 variable, V2 & V3 +/-5%	
Temperature Coefficient	-	V1 & V2 <0.02%/°C, V3 <0.03%/°C	
Overcurrent Protection	-	>105%	
Overvoltage Protection	V	Main output only: 5.7 - 7V	
Hold Up Time (Typ)	ms	20	
Leakage Current	-	0.75mA Max, 0.44mA typical at 230VAC	
Operating Temperature	-	-10°C to +65°C, derate linearly to 50% load from 50°C to 65°C -10°C to +50°C, derate linearly to 60% load from 40°C to 50°C with cover	
Storage Temperature	°C	-30 to +85	
Humidity	-	30 - 90% RH (operating), 10 - 95% RH (non operating)	
Cooling	-	Convection	
Withstand Voltage	-	Input to Ground 2kVAC (20mA), Input to Output 3kVAC (20mA), Output to Ground 500VAC (100mA) for 1 min.	
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 196m/s ² constant X, Y, Z 1 hour	
Shock	-	<196.1m/s ²	
Safety Agency Approvals	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark	
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B, VCCI-B	
Weight (Typ)	g	600	720
Size (WxHxD)	mm	42 x 92 x 188	48 x 92 x 203
Warranty	-	5 Years	

Note: See Installation Manual for full details, test methods of parameters and application notes.

Model Selector								
Model	Output	Voltage	Adjust. Range	Min Current (A)	Max Current (A)	Load Reg (mV)	Line Reg (mV)	Ripple & Noise (mV)
JWT75-522/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-12V	-	0	0.5	150	48	150
JWT75-5FF/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+15V	-	0	3.2	120	60	150
	V3	-15V	-	0	0.5	150	60	150
JWT75-525/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-5V	-	0	0.5	100	20	150
JWT100-522/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-12V	-	0	1	150	48	150
JWT100-5FF/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+15V	-	0	4.5	120	60	150
	V3	-15V	-	0	1	150	60	150
JWT100-525/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-5V	-	0	1	100	20	150

Options	
Suffix	Description
Blank	Screw terminals, no cover
/A	Screw terminals, cover (Standard US stock item)
/R	Remote On / Off
Example	JWT75-525/RC

Outline Drawing JWT Series

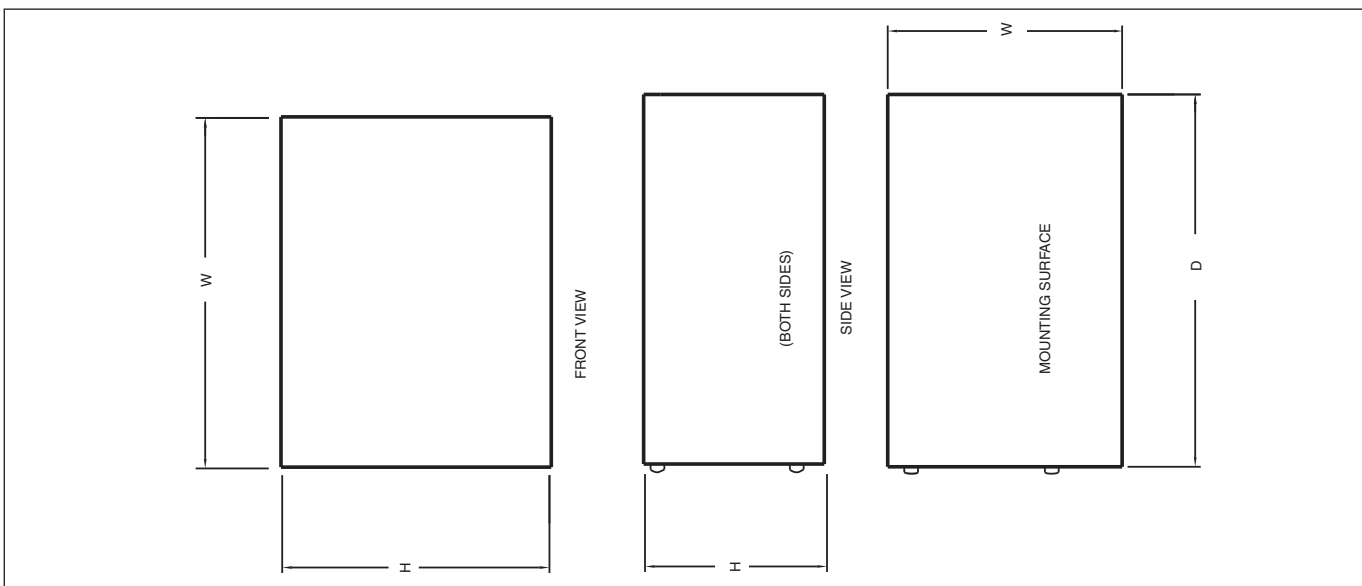



TDK-Lambda France SAS

3 Avenue du Canada
 Parc Technopolis
 Bâtiment Sigma
 91940 les Ulis
 France
 Tel: +33 1 60 12 71 65
 Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Via Giacomo Matteotti 62
 20092 Cinisello Balsamo (MI)
 Italy
 Tel: +39 02 61 29 38 63
 Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
 77855 Achern
 Germany
 Tel: +49 7841 666 0
 Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Aredstrasse 22
 2544 Leobersdorf
 Austria
 Tel: +43 2256 655 84
 Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Eichtalstrasse 55
 8634 Hombrechtikon
 Switzerland
 Tel: +41 44 850 53 53
 Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Haderslevvej 36B
 DK-6000 Kolding
 Denmark
 Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Kingsley Avenue
 Ilfracombe
 Devon EX34 8ES
 United Kingdom
 Tel: +44 (0) 12 71 85 66 66
 Fax: +44 (0) 12 71 86 48 94
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

1 Alexander Yanai
 Segula
 Petah-Tikva
 Israel
 Tel: +9 723 902 4333
 Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:
 Tel: +7 (495) 665 2627
Technical Support:
 Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.emea.lambda.tdk.com/ru

Local Distribution

